




TECHNICAL SHEET FA 60 015 00

Door anchor

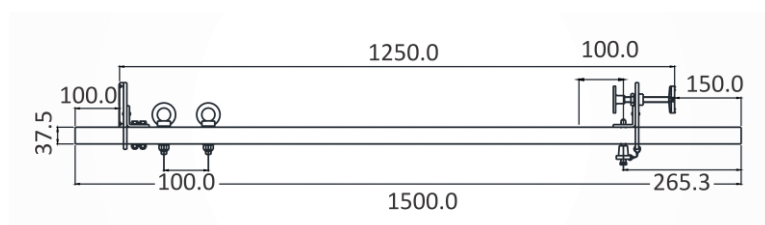

Tested for a use by 2 people



Door anchor bag included

Lenght :	CE	Weight :
1,25 à 1,50 m		4,75 kg

KRATOS SAFETY

ZI les Portes du Dauphiné
4, rue de l'Aigue
69780 Saint Pierre de Chandieu – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

- Transportable anchorage point designed to be used for doorways and windows.
- Simple and robust design.
- Its non-penetrating installation does not damage the host structure.
- No specific tools are required for its installation.
- Can be installed on frames with dimensions from 60 to 125 cm, and can be used by 2 people at the same time.
- **Minimum breaking strength** > 13kN.

Can be used according to the 2 following setups :

- On window frame (facade), use in « vertical » setup: combined with a fall arrest EN360, EN355 or EN353 in order to catch the user in case of a fall.
- On doorframe (indoors), use in « horizontal » setup: combined with a work restraint system EN358 in order to prevent the user from accessing to an area where there is a risk of falling.

- **Compliance** : Complies with EN 795 : 2012 Type B & TS16415 : 2013 Type B.

Maximum load capacity : 140 kg

Material of components :

Aluminium

HS CODE

83081010

CARTON SIZE / PIECES

157x24x10 / 1

AET N° 6176 Issue 1 Extension 1

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551

SGS United Kingdom Ltd., N°0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom